

rx specs



Real-time power

rx hands you the power and flexibility to bring stunning real-time virtual environments into the real world.

Pre-order now
Contact sales@disguise.one

Warranties & Support

- Free software upgrades for the life of the machine
- 2 year return to base hardware warranty
- 12 month renderstream licence included


Bundled accessories

- Slide Rail Kit
- Rack Handles
- Hardware Guide & IEC Power Cables:
- 2x USA
- 2x EU
- 2x UK

Physical specifications

Packed Dimensions:	W	H	D
Unit Dimensions:	438.5mm 17.26"	88.5mm 3.42"	760mm 29.92"
Unit + Rack Handles	483.5mm 19.03"		
Rack Depth:			760mm 29.92"
Unit Weight:		TBCkg	TBClbs
Packed Unit Weight:		35kg	77.16lbs

rx specs

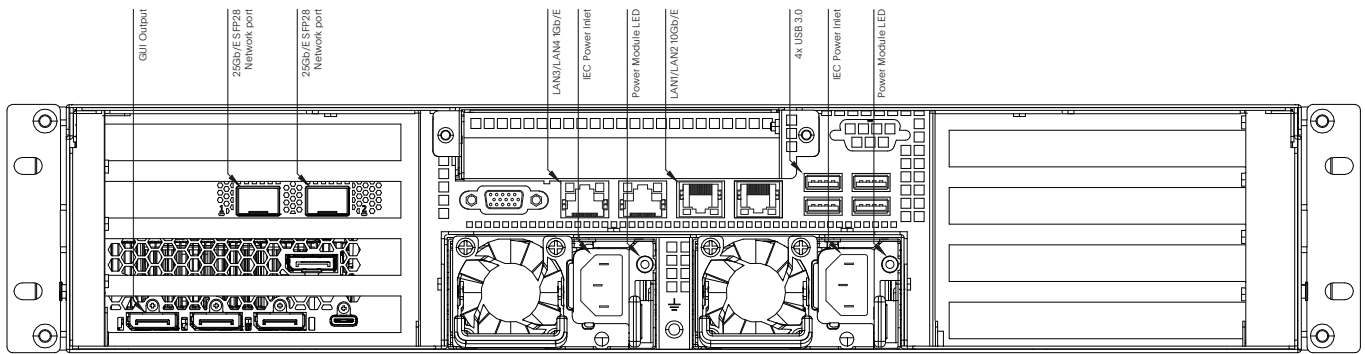

Hardware specifications

Voltage:

100-240VAC, 50-60Hz

Power Consumption:

200W (idle)
600W (max)

Operating System:

Windows® 10 IoT Enterprise SAC

CPU:

Intel® Xeon® Silver 3.2Ghz

Memory:

48GB DDR4 RAM

Environmental Tolerances:

Temperature: 5-30°C (40°-86°F)
Humidity: 20%-80% (non-condensing)
Altitude: 0-8850 ft (0-2700m)

Mounting System:

2U 19" rack mount

Media Storage:

1x 1.8TB NVMe SSD

Secondary Expandable Storage:

Up to 8x 2.5" SATA/SAS HDD

System connectivity I/O

Video Output:

1x Displayport 1.4 (GUI)

General Network:

2x 1Gb/sec Ethernet
2x 10Gb/sec Ethernet

High Speed Network:

2x 25Gb/sec Ethernet

Data/Peripherals:

4x USB 3.0